
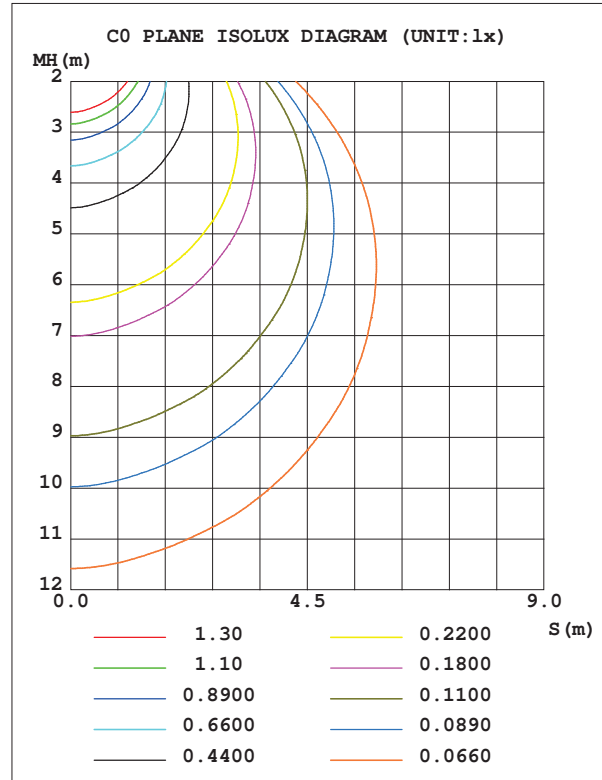


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.44V I:0.0286A P:6.4684W PF:0.9807 Freq:50.00Hz Lamp Flux:721.296x1 lm		
NAME: SUDO MINI ASY FRAME	TYPE:PATH FINDERS	WEIGHT:
SPEC.:3000K, NICHIA, CRI 80	DIM.: 130 x 87 x 76	SERIAL No.:INT/2023/10/44
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 43.34 lm/W
MODEL	KL-2747	I _{max} (cd)	277.1	S/MH (C0/180)		1.30
NOMINAL POWER (W)	6	LOR (%)	38.9	S/MH (C90/270)		0.23
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	280.36	η UP, DN (C0-180)		0.0, 38.3
NOMINAL FLUX (lm)	721.296	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 0.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.00
TEST VOLTAGE (V)	230	η down (%)	38.9	CIBSE SHR MAX		1.00

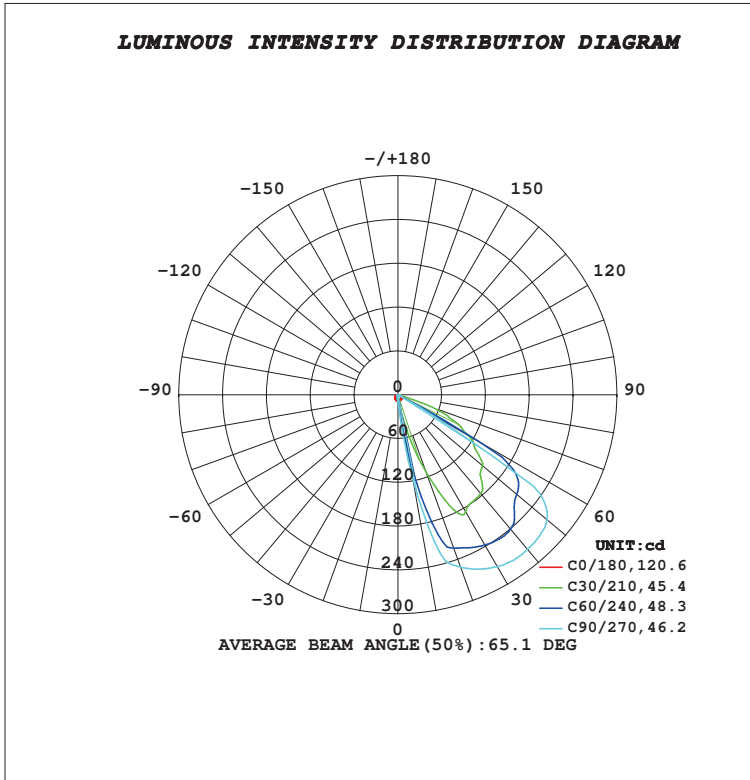

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.0DEG
 Operators:K-LITE
 Test Date:24 October 2023

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 35.8%
 Test Distance:1.935m [K=1.0000]
 Remarks: