

K-LITE

Deep

Power : Upto 40W Upto 80W
Length : 1210mm 2402mm

Upto
100
lm/w

Features

- Lumiled / Equivalent LED's
- CRI Ra>80 (>90 On Request)
- L80 / B10 @ 50,000 Hrs
- Standard suspension kit 1M (2M available on request)

Options



Optical Beam Angle

120°

Diffused

Accessories




Canopy Kit for Dimmable options

K-LITE

Pendant-direct

Pendant-direct / Indirect

Dimension
in mm

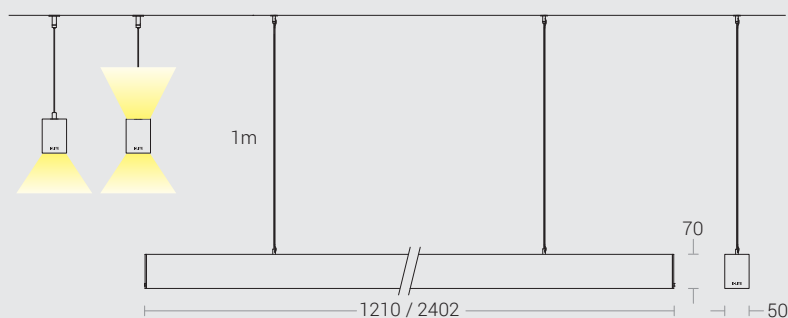


Housing Colour



Extruded aluminium with powder coated finish in
RAL9004 Black I RAL9016 Traffic White


Light
Distribution



Prismatic



PC Opal Matte

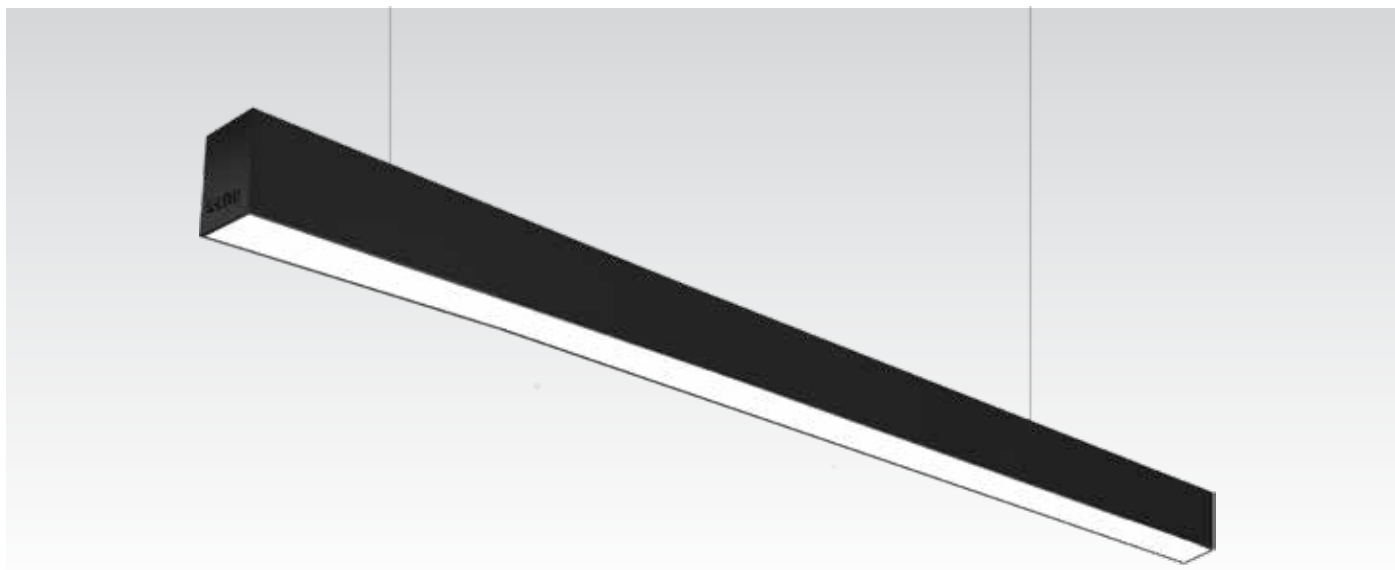

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 198-264Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Lumiled / Equivalent
LED Lumens	: 4500 lm / 6000 lm
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Optical Beam Angle	: 120°
Diffuser Material	: Polycarbonate
Diffuser Finish	: Opal Matte / Prismatic
UGR	: <19

Physical

Body	: Extruded Aluminium with Die-cast Endcaps
Mounting	: Pendant
Finish	: RAL 9004 Black RAL 9016 Traffic White

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV-3KV
Efficiency	: >85%



Ordering Guide

Direct - Opal Matte / Prismatic

ID	Wattage	Dimension (mm)
23412	Upto 40W	1210 x 50 x 70
23412	Upto 80W	2402 x 50 x 70

Direct - Indirect - Opal Matte

ID	Wattage	Dimension (mm)
23412	Upto 40W & 15W	1210 x 50 x 70
23412	Upto 80W & 30W	2402 x 50 x 70

Direct-Prismatic & Indirect-Opal Matte

ID	Wattage	Dimension (mm)
23412	Upto 40W & 15W	1210 x 50 x 70
23412	Upto 80W & 30W	2402 x 50 x 70