

K-LITE

VIO

Power : Upto 40W
Length : 1210mm / 1215mm

Upto
100
lm/w

Features

- Lumiled / Equivalent LED's
- CRI Ra>80
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs




Options

- CCT : 3000K / 4000K / 5700K

Beam Angle




PENDANT-DIRECT



RECESS



Dimension in mm

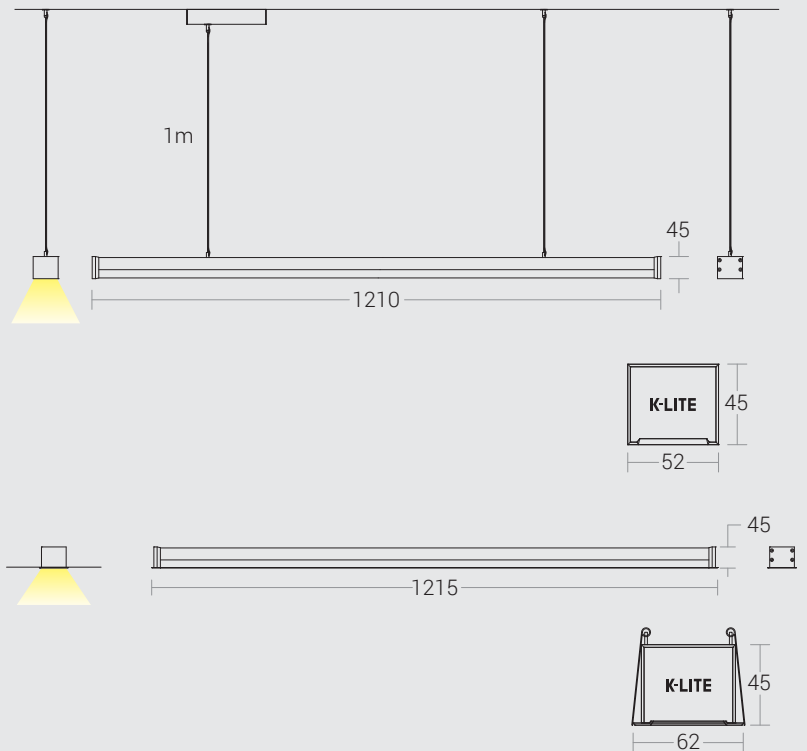

Housing Colour



Extruded aluminium alloy with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light Distribution refer online



Product Description

- IP65 profile for robust outdoor applications
- Extruded aluminium housing for better thermal management.
- Engg. end caps and PC diffuser for optimum optical performance.
- Specially designed potted constant current driver with built-in surge protection
- Integrated driver for easy maintenance and replacement.

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 230-240Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Lumiled / Equivalent
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Beam Angle	: 110°
Diffuser Material	: Polycarbonate

Physical

Body	: Extruded Aluminium alloy with Endcaps
Mounting	: Pendant / Recess
Finish	: Black(RAL9005) White(RAL9016) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >87%



Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3542	Upto 40W	1210 x 52 x 45

Recess

ID	Wattage	C.O.D	Dimension(mm)
3543	Upto 40W	1208 x 55	1215 x 62 x 45